Aquarea Hydraulic

Aquarea T-CAP		9 kW	12 kW	16 kW	20 kW	25 kW	30 kW
P. 70 , 72	R290 **All in One · R290 1ph - 3ph**	 WH-ADC0916M3E51 WH-ADC0916M3E52 [1] WH-ADC0916M3E5AN2 WH-ADC0916M3E53 [1] WH-ADC0916M3E5AN3 WH-ADC0316M9E81 WH-ADC0316M9E82 WH-ADC0316M9E8AN2 WH-ADC0316M9E83 WH-ADC0316M9E8AN3 WH-WXG09ME5 WH-WXG09ME8	 WH-ADC0916M3E51 WH-ADC0916M3E52 [1] WH-ADC0916M3E5AN2 WH-ADC0916M3E53 [1] WH-ADC0916M3E5AN3 WH-ADC0316M9E81 WH-ADC0316M9E82 WH-ADC0316M9E8AN2 WH-ADC0316M9E83 WH-ADC0316M9E8AN3 WH-WXG12ME5 WH-WXG12ME8	 WH-ADC0316M9E81 WH-ADC0316M9E82 WH-ADC0316M9E8AN2 WH-ADC0316M9E83 WH-ADC0316M9E8AN3 WH-WXG16ME8			
P. 70 , 72	R290 **Bi-bloc · R290 1ph - 3ph**	 WH-SDC0916M3E5 [1] WH-SDC0316M9E8 WH-WXG09ME5 WH-WXG09ME8	 WH-SDC0916M3E5 [1] WH-SDC0316M9E8 WH-WXG12ME5 WH-WXG12ME8	 WH-SDC0316M9E8 WH-WXG16ME8			
P. 70 , 72	R290 **Control module · R290 1ph - 3ph**	 WH-CME5 WH-CME8 WH-WXG09ME5 WH-WXG09ME8	 WH-CME5 WH-CME8 WH-WXG12ME5 WH-WXG12ME8	 WH-CME8 WH-WXG16ME8	 WH-CME8L WH-WXG20ME8	 WH-CME8L WH-WXG25ME8	 WH-CME8L WH-WXG30ME8
P. 70 , 72	R290 **Stand-alone · R290 [2] 1ph - 3ph**	 WH-WXG09ME5 WH-WXG09ME8	 WH-WXG12ME5 WH-WXG12ME8	 WH-WXG16ME8	 WH-WXG20ME8	 WH-WXG25ME8	 WH-WXG30ME8
P. 74	**Mono-bloc · R32 1ph - 3ph**	 WH-MXC09J3E5-1 WH-MXC09J3E8-1	 WH-MXC12J6E5-1 WH-MXC12J9E8-1	 WH-MXC16J9E8-1			

Models with R290 refrigerant. Models with R32 refrigerant.
1) Also available with other backup heater capacities. 2) Requires CZ-RTW2TAW1C.
WH-__E5 1ph // WH-__E8 3ph.

Aquarea T-CAP Hydraulic M Series outdoor units. Single phase / Three phase · R290

Natural refrigerant R290 with GWP 0,02.
Energy efficiency: A+++ in heating at 35 °C / Built-in flow meter.
Flexibility: Hydronic connection between indoor and outdoor / Built-in magnetic water filter.
Comfort: Constant capacity at 55 °C down to -15 °C / Operating range to -28 °C / Up to 75 °C flow temperature / 55 °C flow temperature at -25 °C / Low noise level
Control: Optimised user interface and improved features (2 zone control, bivalent control).

Check all our certified heat pumps on:
www.heatpumpkeymark.com



A++ ERP 55 °C A+++ TO D
A+++ ERP 35 °C A+++ TO D
A+ DHW* A+ TO F

*For All in One.

Combination table						Outdoor unit				
Indoor unit						Heating capacity				
						Single phase		Three phase		
		DHW tank	Backup heater capacity	Electrical anode		9,0 kW	12,0 kW	9,0 kW	12,0 kW	16,0 kW
						WH-WXG09ME5	WH-WXG12ME5	WH-WXG09ME8	WH-WXG12ME8	WH-WXG16ME8
Hydraulic All in One	1ph	120 L	3 kW	—	WH-ADC0916M3E51	✔	✔	—	—	—
		185 L	3 kW	—	WH-ADC0916M3E52	✔	✔	—	—	—
		185 L	3 kW	✔	WH-ADC0916M3E5AN2	✔	✔	—	—	—
		185 L	6 kW	—	WH-ADC0916M6E52	✔	✔	—	—	—
		260 L	3 kW	—	WH-ADC0916M3E53	✔	✔	—	—	—
		260 L	3 kW	✔	WH-ADC0916M3E5AN3	✔	✔	—	—	—
		260 L	6 kW	—	WH-ADC0916M6E53	✔	✔	—	—	—
	3ph	120 L	9 kW	—	WH-ADC0316M9E81	✔	✔	✔	✔	✔
		185 L	9 kW	—	WH-ADC0316M9E82	✔	✔	✔	✔	✔
		185 L	9 kW	✔	WH-ADC0316M9E8AN2	✔	✔	✔	✔	✔
		260 L	9 kW	—	WH-ADC0316M9E83	✔	✔	✔	✔	✔
		260 L	9 kW	✔	WH-ADC0316M9E8AN3	✔	✔	✔	✔	✔
Hydraulic Bi-bloc	1ph	—	3 kW	—	WH-SDC0916M3E5	✔	✔	—	—	—
		—	6 kW	—	WH-SDC0916M6E5	✔	✔	—	—	—
	3ph	—	9 kW	—	WH-SDC0316M9E8	✔	✔	✔	✔	✔
Control module	1ph	—	—	—	WH-CME5	✔	✔	—	—	—
	3ph	—	—	—	WH-CME8	✔	✔	✔	✔	✔
Remote controller with Wi-Fi adapter	—	—	—	—	CZ-RTW2TAW1C	✔	✔	✔	✔	✔

Combination table - Big Aquarea T-CAP Hydraulic M Series			Outdoor unit		
Indoor unit			Heating capacity		
			Three phase		
			20,0 kW	25,0 kW	30,0 kW
			WH-WXG20ME8	WH-WXG25ME8	WH-WXG30ME8
Control module	3ph	WH-CME8L	✔	✔	✔
Remote controller with Wi-Fi adapter	—	CZ-RTW2TAW1C	✔	✔	✔

Accessories	
CZ-RTW2TAW1C	Remote controller with Wi-Fi adapter (required for stand-alone outdoor units). M Series
CZ-RTW2-1	Optional remote controller for 2 zone control. M Series
CZ-NS6P	PCB for advanced functions. M Series All in One and Bi-bloc
CZ-NS7P	PCB for advanced functions. M Series control module
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIRELESS	Wireless LCD room thermostat
PAW-A2W-AFVLV-112	1 antifreeze valve 1 1/2". It is required to order 2 valves per system. For 20, 25 and 30 kW
PAW-A2W-AFVLV-1	1 antifreeze valve 1". It is required to order 2 valves per system. For 9, 12 and 16 kW
PAW-TD20C1E5-1	Tank 200 L - Stainless steel
PAW-TD30C1E5-1	Tank 300 L - Stainless steel

Accessories	
PAW-TA20C1E5STD	Tank 200 L - Enamelled
PAW-TA30C1E5STD	Tank 300 L - Enamelled
PAW-TE50H1AE	Tank 500 L - Enamelled DHW
PAW-TE75H1AEAN	Tank 750 L - Enamelled DHW
PAW-TE90H1AEAN	Tank 900 L - Enamelled DHW
PAW-3WYVLV-HW	3 way valve for DHW tanks
PAW-BTANK50L-2	Buffer tank 50 L
PAW-BTANK100L	Buffer tank 100 L
PAW-BTANKG200L	Buffer tank 200 L
PAW-BTANKG260L	Buffer tank 260 L
PAW-BC50FAE	Buffer tank 500 L
PAW-BC80FAE	Buffer tank 800 L
PAW-BC100FAE	Buffer tank 1000 L

R290 REFRIGERANT | A++ ErP 55 °C | A+++ ErP 35 °C | A+ DHW | INVERTER+ | A CLASS WATER PUMP AUTO SPEED | DHW | -28 °C HEATING MODE | WATER FILTER WITH MAGNET | 75 °C OUTPUT WATER FLOW TEMPERATURE | FLOW SENSOR | BOILER CONNECTION | WI-FI INCLUDED | BMS CONNECTIVITY | 5 YEARS COMPRESSOR WARRANTY

DHW A+: For All in One.

Aquarea T-CAP Hydraulic M Series outdoor units.

Outdoor unit			WH-WXG09ME5	WH-WXG12ME5	WH-WXG09ME8	WH-WXG12ME8	WH-WXG16ME8
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	9,00/5,23	12,00/5,06	9,00/5,23	12,00/5,06	16,00/4,89
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	9,00/3,24	12,00/3,23	9,00/3,24	12,00/3,23	16,00/3,20
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	9,00/3,81	12,00/3,54	9,00/3,81	12,00/3,54	16,00/3,30
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	9,00/2,54	12,00/2,42	9,00/2,54	12,00/2,42	16,00/2,37
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	9,00/3,45	12,00/3,00	9,00/3,45	12,00/3,00	16,00/2,53
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	9,00/2,35	12,00/2,17	9,00/2,35	12,00/2,17	16,00/1,97
Cooling capacity / EER (A 35 °C, W 7 °C)		kW / EER	9,00/3,61	9,00/3,61	9,00/3,61	9,00/3,61	9,00/3,61
Cooling capacity / EER (A 35 °C, W 18 °C)		kW / EER	9,00/5,26	12,00/5,26	9,00/5,26	12,00/5,26	16,00/5,26
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η_s %)	4,96/3,57(195/140)	5,00/3,46(197/135)	5,00/3,50(197/137)	4,73/3,65(186/143)	4,75/3,70(187/115)
	Energy class [1]	A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η_s %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,33/4,40(250/173)	6,20/4,40(245/173)	6,08/4,45(240/175)
	Energy class [1]	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η_s %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,45/3,20(175/125)	4,38/3,25(172/127)	4,33/3,40(170/133)
	Energy class [1]	A+++ to D	A++/A++	A++/A++	A+++/A++	A++/A++	A++/A++
Sound power [2]	Heat	dB(A)	52	53	52	53	57
Dimension	H x W x D	mm	1520 x 1200 x 430	1520 x 1200 x 430	1520 x 1200 x 430	1520 x 1200 x 430	1520 x 1200 x 430
Net weight		kg	161	161	161	161	165
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	30/175	30/175	30/175	30/175	30/175
Heating water flow (ΔT=5 K. 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9
Refrigerant (R290) / CO_2 Eq. [3]		kg / T	1,78/0,00004	1,78/0,00004	1,78/0,00004	1,78/0,00004	1,78/0,00004
Operating range - outdoor ambient	Heat	°C	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43
	DHW	°C	-28 ~ +43	-28 ~ +43	-28 ~ +43	-28 ~ +43	-28 ~ +43
Water outlet	Heat / Cool	°C	25 ~ 75 [4] / 5 ~20	25 ~ 75 [4] / 5 ~20	25 ~ 75 [4] / 5 ~20	25 ~ 75 [4] / 5 ~20	25 ~ 75 [4]) / 5 ~20
Recommended fuse, supply [5]		A	30	30	20	20	25
Recommended minimum cable size, supply [5]		mm²	3x4,0	3x4,0	5x1,5	5x1,5	5x2,5

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825 (part load). 3) WH-WXG models are hermetically sealed. 4) Above -15 °C outdoor temperature. Between outdoor ambient -15 °C and -25 °C, the water outlet temperature gradually decreases from 75 °C to 55 °C. Below -25 °C outdoor temperature maximum water outlet temperature is 55 °C. 5) Check local regulations. *EER and COP calculation is based in accordance to EN 14511.


Big Aquarea T-CAP Hydraulic M Series outdoor units.

Outdoor unit			WH-WXG20ME8	WH-WXG25ME8	WH-WXG30ME8
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	20,00/4,80	25,00/4,50	30,00/4,40
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	20,00/3,18	25,00/3,00	30,00/3,00
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	20,00/3,39	25,00/2,80	30,00/2,50
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	20,00/2,08	25,00/1,97	30,00/1,95
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	20,00/2,48	25,00/2,36	30,00/2,33
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	20,00/1,90	25,00/1,80	30,00/1,49
Cooling capacity / EER (A 35 °C, W 7 °C) at Comfort mode		kW / EER	20,00/3,02	25,00/2,86	26,00/2,68
Cooling capacity / EER (A 35 °C, W 7 °C) at Efficiency mode (default)		kW / EER	15,00/3,61	15,00/3,61	15,00/3,61
Cooling capacity / EER (A 35 °C, W 18 °C) at Comfort mode		kW / EER	20,00/4,79	25,00/4,47	30,00/4,10
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η_s %)	4,36/3,59 (171/141)	4,25/3,57 (167/140)	3,95/3,46 (155/135)
	Energy class [1]	A+++ to D	A++/A++	A++/A++	A++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η_s %)	5,37/4,07 (212/160)	5,22/4,14 (206/163)	4,93/4,01 (194/158)
	Energy class [1]	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η_s %)	3,07/2,57 (120/100)	3,16/2,71 (123/105)	3,20/2,71 (125/105)
	Energy class [1]	A+++ to D	A/A+	A+/A+	A+/A+
Sound power [2]	Heat	dB(A)	56	59	61
Dimension	H x W x D	mm	1645 x 1500 x 460	1645 x 1500 x 460	1645 x 1500 x 460
Net weight		kg	240	240	240
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	230	230	230
Heating water flow (ΔT=5 K. 35 °C)		L/min	57,3	71,6	86,0
Refrigerant (R290) / CO_2 Eq. [3]		kg / T	3,0/0,00006	3,0/0,00006	3,0/0,00006
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35	-25 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43
Water outlet	Heat / Cool	°C	20 ~ 75 [4] / 5 ~ 20	20 ~ 75 [4] / 5 ~ 20	20 ~ 75 [4] / 5 ~ 20
Recommended fuse, supply [5]		A	50	50	50
Recommended minimum cable size, supply [5]		mm²	5x10 - 5x16	5x10 - 5x16	5x10 - 5x16

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825 (part load). 3) WH-WXG models are hermetically sealed. 4) Above 15 °C ambient temperature. 5) Check local regulations. *EER and COP calculation is based in accordance to EN 14511.

Aquarea T-CAP Hydraulic M Series indoor units. Single phase / Three phase · R290

Natural refrigerant R290 with GWP 0,02.
Control: All control functions / 2 CN-CNT ports / Optional PCB for advanced functions.
Connectivity: Wi-Fi adapter included for smart control via Comfort Cloud App / Optional integration into BMS.

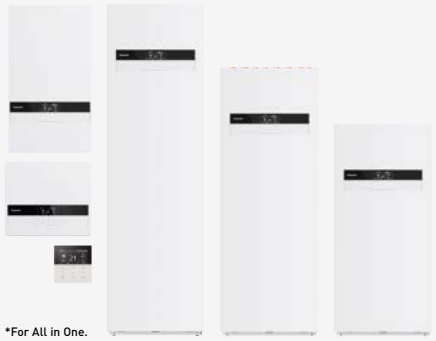

Control module:

Flexibility: Simplified installation / Minimal interior space required / Supports third-party backup heater.

Indoor unit			WH-CME5	WH-CME8	WH-CME8L
Dimension / Net weight	H x W x D	mm / kg	454 x 520 x 116 / 7	454 x 520 x 116 / 7	454 x 520 x 116 / 7
Field supply electrical backup heater		kW	Up to 3 kW	Up to 9 kW	Up to 18 kW
Recommended fuse, supply [1]		A	16	30	≤9 kW: 20 — 9 kW< ≤18 kW: 40
Recommended minimum cable size, supply [1]		mm²	3x1,5	3x4,0	≤12 kW: 5x2,5 12 kW< ≤15 kW: 5x4,0 15 kW< ≤18 kW: 5x6,0
Connecting cable to the outdoor unit size		mm²	2x0,75	2x0,75	2x0,75

1) Check local regulations.

Bi-bloc:

Flexibility: Flexible choice of DHW tank size.

Indoor unit			WH-SDC0916M3E5	WH-SDC0916M6E5	WH-SDC0316M9E8
Sound pressure	Heat / Cool	dB(A)	22 / 22	22 / 22	22 / 22
Dimension / Net weight	H x W x D	mm / kg	892 x 500 x 348 / 28	892 x 500 x 348 / 28	892 x 500 x 348 / 29
Water pipe connector	Room	Inch	1¼	1¼	1¼
Water pipe connector (indoor / outdoor units)		Inch	1¼ / 1¼	1¼ / 1¼	1¼ / 1¼
Pipe length range standard / maximum		m	5 / 30	5 / 30	5 / 30
Elevation difference (in / out)		m	30	30	30

Electrical information for Bi-bloc and All in One indoor units		Single phase (3 kW heater)	Single phase (6 kW heater)	Three phase (9 kW heater)
Electric backup heater	kW	3,00	6,00	9,00
Recommended fuse, supply [1]	A	16	30	20
Recommended minimum cable size, supply [1]	mm²	3x1,5	3x4,0	5x1,5
Connecting cable to the outdoor unit size	mm²	2x0,75	2x0,75	2x0,75

1) Check local regulations. *This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
CZ-RTW2TAW1C	Remote controller with Wi-Fi adapter (required for stand-alone outdoor units). M Series
CZ-RTW2-1	Optional remote controller for 2 zone control. M Series
CZ-NS6P	PCB for advanced functions. M Series All in One and Bi-bloc
CZ-NS7P	PCB for advanced functions. M Series control module
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIRELESS	Wireless LCD room thermostat
CZ-NV3	3 way valve kit to fit inside the hydrokit. M Series
PAW-TD20C1E5-1	Tank 200 L - Stainless steel
PAW-TD30C1E5-1	Tank 300 L - Stainless steel
PAW-TA20C1E5STD	Tank 200 L - Enamelled

Accessories	
PAW-TA30C1E5STD	Tank 300 L - Enamelled
PAW-TE50H1AE	Tank 500 L - Enamelled DHW
PAW-TE75H1AEAN	Tank 750 L - Enamelled DHW
PAW-TE90H1AEAN	Tank 900 L - Enamelled DHW
PAW-3WYVLV-HW	3 way valve for DHW tanks
PAW-BTANK50L-2	Buffer tank 50 L
PAW-BTANK100L	Buffer tank 100 L
PAW-BTANKG200L	Buffer tank 200 L
PAW-BTANKG260L	Buffer tank 260 L
PAW-BC50FAE	Buffer tank 500 L
PAW-BC80FAE	Buffer tank 800 L
PAW-BC100FAE	Buffer tank 1000 L



DHW A+: For All in One.

All in One:

Energy efficiency: A+ in DHW / DHW up to 65 °C without heater / Stainless steel DHW tank with U-Vacua™.
Flexibility: Backup heater included / Built-in 10 L expansion vessel / 30 m maximum height difference between indoor and outdoor / Suitable for harsh-water installations (AN version).

All in One with 120 L DHW tank*			Single phase	Three phase
Indoor unit			**WH-ADC0916M3E51**	**WH-ADC0316M9E81**
Dimension / Net weight	H x W x D	mm / kg	1293 x 599 x 602 / 74	1293 x 599 x 602 / 74
Water volume		L	120	120
Electric backup heater		kW	3,00	9,00

Domestic Hot Water energy efficiency							
Indoor unit			**WH-ADC0916M3E51**	**WH-ADC0916M3E51**	**WH-ADC0316M9E81**	**WH-ADC0316M9E81**	**WH-ADC0316M9E81**
Outdoor unit			**WH-WXG09ME5**	**WH-WXG12ME5**	**WH-WXG09ME8**	**WH-WXG12ME8**	**WH-WXG16ME8**
Tapping profile according EN16147			L	L	L	L	L
DHW tank ERP efficiency average / warm / cold [1]		A+ to F	A+/A/A	A+/A/A	A+/A/A	A+/A/A	A+/A/A
DHW tank ERP average climate ɳ / COPdHW		ɳwh % / COPdHW	96/2,41	96/2,41	96/2,41	96/2,41	96/2,41
DHW tank ERP warm climate ɳ / COPdHW		ɳwh % / COPdHW	101/2,7	101/2,7	101/2,7	101/2,7	101/2,7
DHW tank ERP cold climate ɳ / COPdHW		ɳwh % / COPdHW	70/1,75	70/1,75	70/1,75	70/1,75	70/1,75

All in One with 185 L DHW tank			Single phase		Three phase
Indoor unit			**WH-ADC0916M3E52**	**WH-ADC0916M6E52**	**WH-ADC0316M9E82**
Indoor unit with Electrical Anode			**WH-ADC0916M3E5AN2**	**—**	**WH-ADC0316M9E8AN2**
Dimension / Net weight	H x W x D	mm / kg	1642 x 599 x 602 / 89	1642 x 599 x 602 / 89	1642 x 599 x 602 / 89
Water volume		L	185	185	185
Electric backup heater		kW	3,00	6,00	9,00

Domestic Hot Water energy efficiency							
Indoor unit			**WH-ADC0916M3E52**	**WH-ADC0916M3E52**	**WH-ADC0316M9E82**	**WH-ADC0316M9E82**	**WH-ADC0316M9E82**
			WH-ADC0916M6E52	**WH-ADC0916M6E52**	**—**	**—**	**—**
			WH-ADC0916M3E5AN2	**WH-ADC0916M3E5AN2**	**WH-ADC0316M9E8AN2**	**WH-ADC0316M9E8AN2**	**WH-ADC0316M9E8AN2**
Outdoor unit			**WH-WXG09ME5**	**WH-WXG12ME5**	**WH-WXG09ME8**	**WH-WXG12ME8**	**WH-WXG16ME8**
Tapping profile according EN16147			L	L	L	L	L
DHW tank ERP efficiency average / warm / cold [1]		A+ to F	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A
DHW tank ERP average climate ɳ / COPdHW		ɳwh % / COPdHW	123/3,00	123/3,00	123/3,00	123/3,00	117/2,85
DHW tank ERP warm climate ɳ / COPdHW		ɳwh % / COPdHW	132/3,30	132/3,30	132/3,30	132/3,30	128/3,20
DHW tank ERP cold climate ɳ / COPdHW		ɳwh % / COPdHW	88/2,20	88/2,20	88/2,20	88/2,20	84/2,10

All in One with 260 L DHW tank			Single phase		Three phase
Indoor unit			**WH-ADC0916M3E53**	**WH-ADC0916M6E53**	**WH-ADC0316M9E83**
Indoor unit with Electrical Anode			**WH-ADC0916M3E5AN3**	**—**	**WH-ADC0316M9E8AN3**
Dimension / Net weight	H x W x D	mm / kg	2036 x 599 x 602 / 105	2036 x 599 x 602 / 105	2036 x 599 x 602 / 105
Water volume		L	260	260	260
Electric backup heater		kW	3,00	6,00	9,00

Domestic Hot Water energy efficiency							
Indoor unit			**WH-ADC0916M3E53**	**WH-ADC0916M3E53**	**WH-ADC0316M9E83**	**WH-ADC0316M9E83**	**WH-ADC0316M9E83**
			WH-ADC0916M6E53	**WH-ADC0916M6E53**	**—**	**—**	**—**
			WH-ADC0916M3E5AN3	**WH-ADC0916M3E5AN3**	**WH-ADC0316M9E8AN3**	**WH-ADC0316M9E8AN3**	**WH-ADC0316M9E8AN3**
Outdoor unit			**WH-WXG09ME5**	**WH-WXG12ME5**	**WH-WXG09ME8**	**WH-WXG12ME8**	**WH-WXG16ME8**
Tapping profile according EN16147			XL	XL	XL	XL	XL
DHW tank ERP efficiency average / warm / cold [1]		A+ to F	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A / A+ / A
DHW tank ERP average climate ɳ / COPdHW		ɳwh % / COPdHW	123/3,00	123/3,00	125/3,10	125/3,10	115/2,85
DHW tank ERP warm climate ɳ / COPdHW		ɳwh % / COPdHW	132/3,30	132/3,30	136/3,35	136/3,35	129/3,20
DHW tank ERP cold climate ɳ / COPdHW		ɳwh % / COPdHW	88/2,20	88/2,20	95/2,35	95/2,35	85/2,10

All in One Indoor units technical data			
Sound pressure	Heat / Cool	dB(A)	22/22
Water pipe connector	Room / Shower	Inch	1¼/¾
Maximum DHW temperature		°C	65
Material inside tank			Stainless steel
Water pipe connector (indoor / outdoor units)		Inch	1¼/1¼
Pipe length range standard / maximum		m	5/30
Elevation difference (in / out)		m	30

1) Scale from A+ to F. *This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

Aquarea T-CAP Hydraulic M Series. Three phase · R290

WH-WXG09ME5																		
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	7,90	3,50	2,26	8,20	4,20	1,95	7,90	4,80	1,65	7,60	5,70	1,33	—	—	—	—	—	—
-20	7,90	2,94	2,69	8,20	3,34	2,46	7,90	3,99	1,98	7,60	4,76	1,60	7,10	5,30	1,34	—	—	—
-15	9,00	2,74	3,28	9,00	3,30	2,73	9,00	3,97	2,27	9,00	4,48	2,01	9,00	5,27	1,71	8,20	6,50	1,26
-7	9,00	2,26	3,98	9,00	2,61	3,45	9,00	3,35	2,69	9,00	3,83	2,35	9,00	4,68	1,92	9,00	5,90	1,53
2	8,80	1,95	4,51	9,00	2,36	3,81	9,00	2,91	3,09	9,00	3,54	2,54	9,00	4,29	2,10	9,00	5,50	1,64
7	9,00	1,24	7,26	9,00	1,72	5,23	9,00	2,30	3,91	9,00	2,78	3,24	9,00	3,46	2,60	8,90	4,98	1,79
25	7,20	0,86	8,37	9,00	1,08	8,33	9,00	1,55	5,81	9,00	2,05	4,39	9,00	2,68	3,36	8,40	3,45	2,43
WH-WXG12ME5																		
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	10,20	4,90	2,08	10,50	5,55	1,89	9,50	5,75	1,65	8,65	5,90	1,47	—	—	—	—	—	—
-20	11,00	4,25	2,59	11,20	4,75	2,36	10,00	5,00	2,00	10,00	5,70	1,75	9,10	5,80	1,57	—	—	—
-15	12,00	4,27	2,81	12,00	4,56	2,63	11,50	5,42	2,12	11,00	5,50	2,00	10,00	5,88	1,70	9,00	6,10	1,48
-7	11,50	3,68	3,13	12,00	4,00	3,00	12,00	5,02	2,39	12,00	5,53	2,17	11,00	6,01	1,83	10,00	6,20	1,61
2	11,50	2,92	3,94	12,00	3,39	3,54	12,00	4,20	2,86	12,00	4,95	2,42	12,00	5,94	2,02	10,50	6,20	1,69
7	12,00	1,93	6,22	12,00	2,37	5,06	12,00	3,13	3,83	12,00	3,71	3,23	12,00	4,62	2,60	12,00	6,10	1,97
25	9,80	1,10	8,91	12,00	1,40	8,57	12,00	2,00	6,00	12,00	2,60	4,62	12,00	3,26	3,68	12,00	3,92	3,06
WH-WXG09ME8																		
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	7,90	3,50	2,26	8,20	4,20	1,95	7,90	4,80	1,65	7,60	5,70	1,33	—	—	—	—	—	—
-20	7,90	2,94	2,69	8,20	3,34	2,46	7,90	3,99	1,98	7,60	4,76	1,60	7,10	5,30	1,34	—	—	—
-15	9,00	2,74	3,28	9,00	3,30	2,73	9,00	3,97	2,27	9,00	4,48	2,01	9,00	5,27	1,71	8,20	6,50	1,26
-7	9,00	2,26	3,98	9,00	2,61	3,45	9,00	3,35	2,69	9,00	3,83	2,35	9,00	4,68	1,92	9,00	5,90	1,53
2	8,80	1,95	4,51	9,00	2,36	3,81	9,00	2,91	3,09	9,00	3,54	2,54	9,00	4,29	2,10	9,00	5,50	1,64
7	9,00	1,24	7,26	9,00	1,72	5,23	9,00	2,30	3,91	9,00	2,78	3,24	9,00	3,46	2,60	8,90	4,98	1,79
25	7,20	0,86	8,37	9,00	1,08	8,33	9,00	1,55	5,81	9,00	2,05	4,39	9,00	2,68	3,36	8,40	3,45	2,43
WH-WXG12ME8																		
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	10,20	4,90	2,08	10,50	5,55	1,89	9,80	6,70	1,46	9,70	7,40	1,31	—	—	—	—	—	—
-20	11,00	4,25	2,59	11,20	4,75	2,36	11,00	5,50	2,00	10,20	6,45	1,67	10,30	7,95	1,36	—	—	—
-15	12,00	4,27	2,81	12,00	4,56	2,63	12,00	5,67	2,12	12,00	6,00	2,00	12,00	7,06	1,70	11,00	8,45	1,30
-7	11,50	3,68	3,13	12,00	4,00	3,00	12,00	5,02	2,39	12,00	5,53	2,17	12,00	6,57	1,83	11,60	7,30	1,59
2	11,50	2,92	3,94	12,00	3,39	3,54	12,00	4,20	2,86	12,00	4,95	2,42	12,00	5,94	2,02	12,00	7,30	1,64
7	12,00	1,93	6,22	12,00	2,37	5,06	12,00	3,13	3,83	12,00	3,71	3,23	12,00	4,62	2,60	12,00	6,10	1,97
25	9,80	1,10	8,91	12,00	1,40	8,57	12,00	2,00	6,00	12,00	2,60	4,62	12,00	3,26	3,68	12,00	3,92	3,06
WH-WXG16ME8																		
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	14,20	6,80	2,09	14,20	7,80	1,82	14,20	8,60	1,65	14,00	10,53	1,33	—	—	—	—	—	—
-20	14,20	5,40	2,63	14,20	6,10	2,33	14,20	6,90	2,06	14,20	8,10	1,75	14,20	10,16	1,40	—	—	—
-15	16,00	5,90	2,71	16,00	6,70	2,39	16,00	7,70	2,08	16,00	8,70	1,84	16,00	10,15	1,58	14,20	10,90	1,30
-7	16,00	5,40	2,96	16,00	6,32	2,53	16,00	7,10	2,25	16,00	8,12	1,97	16,00	9,40	1,70	16,00	10,30	1,55
2	16,00	3,63	4,41	16,00	4,85	3,30	16,00	5,88	2,72	16,00	6,75	2,37	16,00	8,15	1,96	16,00	9,99	1,60
7	16,00	2,70	5,93	16,00	3,27	4,89	16,00	4,19	3,82	16,00	5,00	3,20	16,00	6,30	2,54	16,00	7,60	2,11
25	16,00	1,45	11,03	16,00	1,99	8,04	16,00	2,85	5,61	16,00	3,65	4,38	16,00	4,75	3,37	16,00	6,30	2,54

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW).
This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Aquarea T-CAP Hydraulic M Series. Three phase · R290

WH-WXG09ME5									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	9,80	2,00	4,90	11,00	2,04	5,39	10,80	1,38	7,83
25	9,30	2,28	4,08	10,50	2,35	4,47	10,20	1,49	6,85
35	9,00	2,49	3,61	9,80	2,63	3,73	9,00	1,71	5,26
43	8,40	2,80	3,00	9,00	2,88	3,13	8,60	2,00	4,30
WH-WXG12ME5									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	12,00	2,50	4,80	13,70	2,60	5,27	12,00	1,73	6,94
25	12,00	3,05	3,93	13,50	3,12	4,33	12,00	1,88	6,38
35	12,00	4,21	2,85	13,20	3,25	4,06	12,00	2,80	4,29
43	9,60	4,35	2,21	10,00	4,35	2,30	12,00	3,60	3,33
WH-WXG09ME8									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	9,80	2,00	4,90	11,00	2,04	5,39	10,80	1,38	7,83
25	9,30	2,28	4,08	10,50	2,35	4,47	10,20	1,49	6,85
35	9,00	2,49	3,61	9,80	2,63	3,73	9,00	1,71	5,26
43	8,40	2,80	3,00	9,00	2,88	3,13	8,60	2,00	4,30
WH-WXG12ME8									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	12,00	2,50	4,80	13,70	2,60	5,27	12,00	1,73	6,94
25	12,00	3,05	3,93	13,50	3,12	4,33	12,00	1,88	6,38
35	12,00	4,21	2,85	13,20	3,25	4,06	12,00	2,80	4,29
43	10,80	4,89	2,21	11,20	4,87	2,30	12,00	3,60	3,33
WH-WXG16ME8									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	15,50	3,00	5,17	15,80	2,75	5,75	16,00	2,50	6,40
25	15,00	3,75	4,00	15,50	3,40	4,56	16,00	3,10	5,16
35	14,50	5,05	2,87	14,50	4,50	3,22	15,50	3,95	3,92
43	12,00	5,15	2,33	12,00	5,20	2,31	15,00	5,35	2,80

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW).
This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

Big Aquarea T-CAP Hydraulic Stand-alone M Series. Three phase · R290

WH-WXG20ME8																		
Tamb	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**
LWC	**25**	**25**	**25**	**35**	**35**	**35**	**45**	**45**	**45**	**55**	**55**	**55**	**65**	**65**	**65**	**75**	**75**	**75**
-25	20,00	9,15	2,19	20,00	11,23	1,78	20,00	13,32	1,50	—	—	—	—	—	—	—	—	—
-20	20,00	8,55	2,34	20,00	10,50	1,90	20,00	12,45	1,61	20,00	14,40	1,39	On request			—	—	—
-15	20,00	6,80	2,94	20,00	8,53	2,34	20,00	10,27	1,95	20,00	12,00	1,67	20,00	10,45	1,91	—	—	—
-7	20,00	6,83	2,93	20,00	8,05	2,48	20,00	9,28	2,16	20,00	10,50	1,90	20,00	10,60	1,89	—	—	—
2	20,00	3,99	5,01	20,00	5,90	3,39	20,00	7,81	2,56	20,00	9,61	2,08	20,00	11,00	1,82	—	—	—
7	20,00	2,50	8,00	20,00	4,17	4,80	20,00	5,84	3,42	20,00	6,28	3,18	20,00	9,16	2,18	—	—	—
25	20,00	2,33	8,58	20,00	2,60	7,69	20,00	2,87	6,97	20,00	3,14	6,37	20,00	4,03	4,96	20,00	7,67	2,61
WH-WXG25ME8																		
Tamb	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**
LWC	**25**	**25**	**25**	**35**	**35**	**35**	**45**	**45**	**45**	**55**	**55**	**55**	**65**	**65**	**65**	**75**	**75**	**75**
-25	22,00	11,34	1,94	23,00	13,80	1,67	24,00	16,26	1,48	—	—	—	—	—	—	—	—	—
-20	23,00	10,60	2,17	25,00	12,90	1,94	25,00	15,20	1,64	25,00	17,50	1,43	On request			—	—	—
-15	25,00	9,80	2,55	25,00	11,80	2,12	25,00	13,80	1,81	25,00	15,80	1,58	24,00	13,25	1,81	—	—	—
-7	25,00	7,60	3,29	25,00	10,60	2,36	25,00	13,60	1,84	25,00	13,90	1,80	25,00	14,10	1,77	—	—	—
2	25,00	6,85	3,65	25,00	8,93	2,80	25,00	11,01	2,27	25,00	12,70	1,97	25,00	13,70	1,82	—	—	—
7	25,00	3,89	6,43	25,00	5,55	4,50	25,00	7,21	3,47	25,00	8,33	3,00	25,00	11,60	2,16	—	—	—
25	25,00	3,09	8,09	25,00	3,42	7,31	25,00	3,75	6,67	25,00	4,08	6,13	25,00	5,18	4,83	25,00	9,60	2,60
WH-WXG30ME8																		
Tamb	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**	**HC**	**IP**	**COP**
LWC	**25**	**25**	**25**	**35**	**35**	**35**	**45**	**45**	**45**	**55**	**55**	**55**	**65**	**65**	**65**	**75**	**75**	**75**
-25	22,00	11,34	1,94	23,00	13,80	1,67	24,00	16,26	1,48	—	—	—	—	—	—	—	—	—
-20	23,00	10,60	2,17	25,00	12,90	1,94	25,00	15,20	1,64	25,00	17,50	1,43	On request			—	—	—
-15	27,00	13,43	2,01	30,00	15,50	1,94	30,00	17,57	1,71	30,00	19,64	1,53	25,00	14,61	1,71	—	—	—
-7	29,00	9,70	2,99	30,00	12,90	2,33	30,00	16,10	1,86	30,00	19,30	1,55	30,00	17,10	1,75	—	—	—
2	30,00	10,10	2,97	30,00	12,00	2,50	30,00	13,90	2,16	30,00	15,40	1,95	30,00	16,70	1,80	—	—	—
7	30,00	4,88	6,15	30,00	6,82	4,40	30,00	8,76	3,42	30,00	10,00	3,00	30,00	14,00	2,14	—	—	—
25	30,00	4,33	6,93	30,00	4,60	6,52	30,00	4,87	6,16	30,00	5,14	5,84	30,00	6,49	4,62	25,00	9,60	2,60

Big Aquarea T-CAP Hydraulic Stand-alone M Series. Three phase · R290

WH-WXG20ME8									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	20,00	3,22	6,21	20,00	3,10	6,45	20,00	2,99	6,69
25	20,00	4,65	4,30	20,00	4,01	4,99	20,00	3,38	5,92
35	20,00	6,62	3,02	20,00	5,40	3,70	20,00	4,18	4,78
43	20,00	9,06	2,21	20,00	7,37	2,71	20,00	5,68	3,52
WH-WXG25ME8									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	25,00	4,56	5,48	25,00	4,32	5,79	25,00	4,09	6,11
25	25,00	6,35	3,94	25,00	5,45	4,59	25,00	4,57	5,47
35	25,00	8,74	2,86	25,00	7,17	3,49	25,00	5,59	4,47
43	21,80	9,44	2,31	23,40	8,63	2,71	25,00	7,54	3,32
WH-WXG30ME8									
Tamb	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**	**CC**	**IP**	**EER**
LWC	**7**	**7**	**7**	**14**	**14**	**14**	**18**	**18**	**18**
16	28,00	5,14	5,45	29,00	5,19	5,59	30,00	5,23	5,74
25	28,00	6,84	4,09	29,00	6,38	4,55	30,00	5,92	5,07
35	26,00	9,70	2,68	28,00	8,51	3,29	30,00	7,32	4,10
43	21,80	9,44	2,31	25,90	9,60	2,70	30,00	9,76	3,07

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW).
This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.
*Data to be confirmed.